


SETTING SOUNDER RINGING DURATIONS MXPRO5

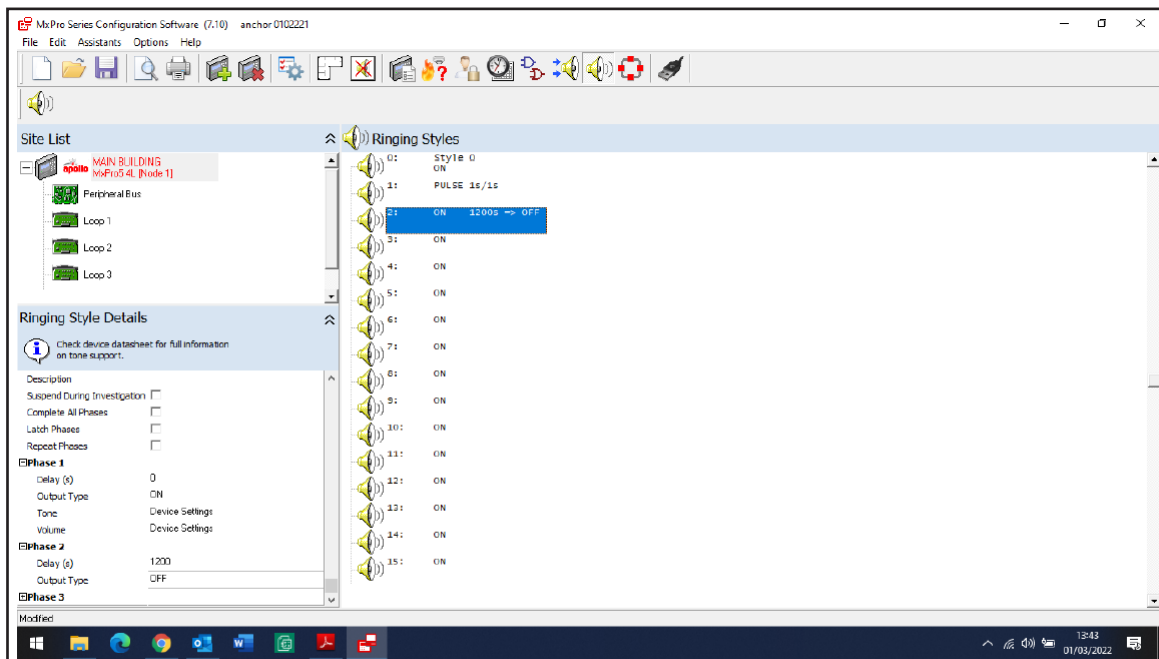

The screenshot shows the 'MxPro Series Configuration Software (7.10)' interface. The 'Ringing Styles' list on the right contains the following entries:


0:	Style 0
1:	PULSE 1s/1s
2:	ON 1200s → OFF
3:	ON
4:	ON
5:	ON
6:	ON
7:	ON
8:	ON
9:	ON
10:	ON
11:	ON
12:	ON
13:	ON
14:	ON
15:	ON

The 'Ringing Style Details' panel on the left shows the following configuration for Phase 2:

Check device datasheet for full information on tone support.	
Description	
Suspend During Investigation	<input type="checkbox"/>
Complete All Phases	<input type="checkbox"/>
Latch Phases	<input type="checkbox"/>
Repeat Phases	<input type="checkbox"/>
Phase 1	
Delay (s)	0
Output Type	ON
Tone	Device Settings
Volume	Device Settings
Phase 2	
Delay (s)	1200
Output Type	OFF
Phase 3	

Below the screenshot, the following text is provided:

Create a new ringing style – Style 2 in this example. Set the phase 2 delay to the required duration that the sounders will ring for – 1200 secs = 20mins in this example. Select OFF in the output type, this will then ring the sounders for a 20mins duration and then turn off.

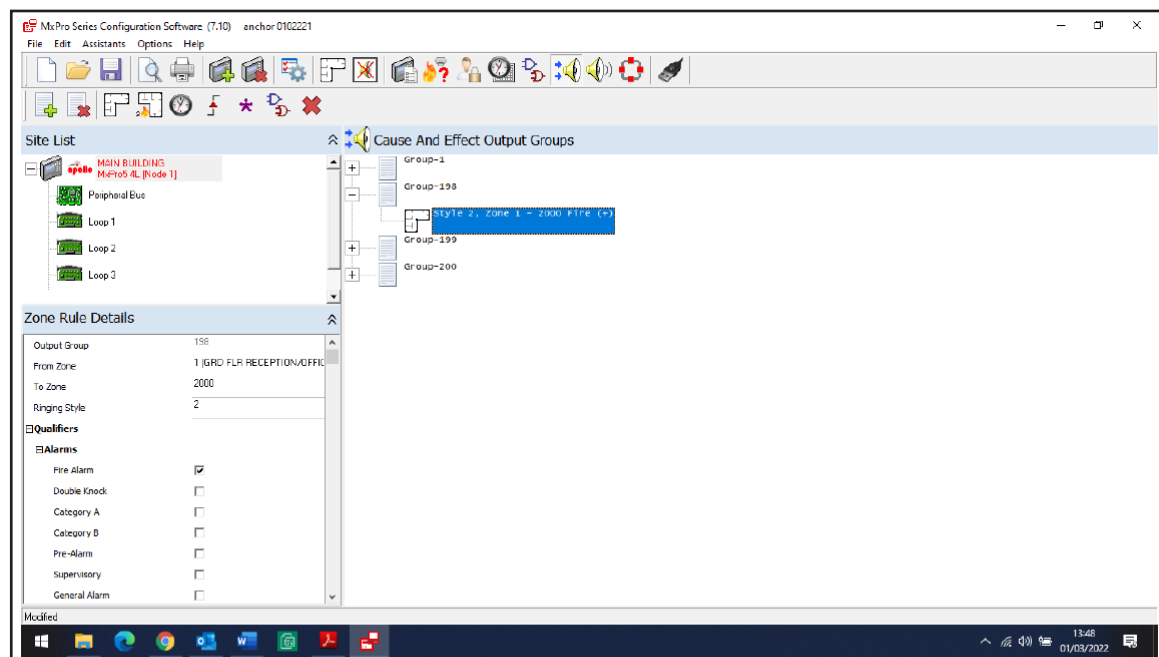

The screenshot shows the 'MxPro Series Configuration Software (7.10)' interface. The 'Cause And Effect Output Groups' list on the right contains the following entries:

Group-1
Group-198
Group-199
Group-200

The 'Zone Rule Details' panel on the left shows the following configuration for Group-198:

Output Group	198
From Zone	1 (GRD FLR RECEPTION/OFF)
To Zone	2000
Ring Style	2
Qualifiers	
Alarms	
Fire Alarm	<input checked="" type="checkbox"/>
Double Knock	<input type="checkbox"/>
Category A	<input type="checkbox"/>
Category B	<input type="checkbox"/>
Pre-Alarm	<input type="checkbox"/>
Supervisory	<input type="checkbox"/>
General Alarm	<input type="checkbox"/>

Below the screenshot, the following text is provided:

In the Cause-and-Effect groups select the sounder group 198 (this is the default for sounders) Ensure all wireless sounders are in this group. Set the ring style to 2 – this will then pull through the 20min duration on all the sounders.